




ZPR-2820V2

Zoning Mixer | 4 dual stereo + 2 Mic into 2 output zones

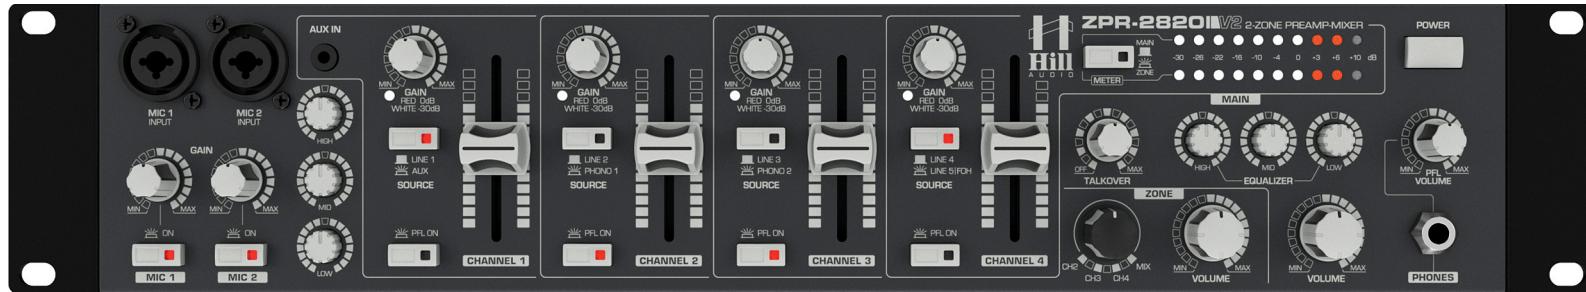

CONCEPT

The ZPR-2820V2 2-Zone Rack Mixer is a specific product for venues with combined foreground and background music requirements. While the user interface even allows basic DJ use on occasions when required, other features cater for the requirements of an auxiliary background music zone. In a typical application, party music can be played by a DJ during a weekend inside a pub while soft music is played in the patio area – just to revert to playing the same soft music inside and outside of the venue on a weekday, all with the same sound system and setup. The unique CascadeZone © system makes such scenario changes quick and comfortable, and microphone priority and emergency features allow for easy integration with building evacuation systems. Perfect for any multi-purpose hospitality venue, such as pubs, hotels and restaurants.

FEATURES

- 4 dual-source stereo inputs (2xLine/Line, 2xPhono/Line) with 2-color signal/peak LED and front-panel gain control
- 45mm smooth dual-rail input channel faders
- 1 balanced stereo input (FOH input)
- Front panel 3.5mm stereo TRS input
- 2x Mic inputs with front-side Combo connectors and rear-side 1/4" TRS connectors
- 12V phantom power for microphones by internal jumper
- Voice-specific 3-Band EQ plus "on air" switches for mic inputs
- Adjustable auto talk-over for automatic music level reduction when microphone is used
- Two stereo output zones
- CascadeZone ©: Source for 2nd zone output selectable from Input 1-3 or first zone signal
- Zone-assignable 2x10LED level meter
- Rear-side adjustable maximum level control for each zone
- Balanced XLR and Phoenix output connectors plus unbalanced RCA connectors for each zone
- 3-Band EQ (front panel) for zone 1 and 2-Band EQ (rear panel) for zone 2

- 100Hz High pass filter and mono switch for zone 2
- Emergency input which shuts down master output when emergency signal comes in and plays emergency signal instead
- Output mute contact to externally mute the output
- PFL section with volume control and front-side 6.3mm stereo jack
- Unbalanced record output
- All switches with LED status indicator
- Internal wide-voltage swing linear power supply for excellent audio dynamics
- Full metal case with detachable rack ears
- AC mains voltage selector switch 115/230V
- CE/ROHS compliant



TECHNICAL DATA

Signal/Noise.....	>82dBu (unwgtd 22Hz-22KHz)
Crosstalk Damping.....	>65dB (Line)
THD.....	<0.05% (Line)
Frequency response.....	20Hz – 20 kHz
AC IN	115V/230~ 50/60Hz
Power consumption.....	max. 20W
Dimensions.....	W483xH88.0xD162.0mm
Weight.....	3.10 kg

LOGISTICS DATA

Order Number.....	2004811
Single unit EAN-13.....	5060502920362
Single Carton size.....	535x255x135mm
Single Carton gross weight.....	3.7kg
Units per master carton.....	2
Master carton size.....	560x285x290mm
Master carton gross weight.....	8.6kg